


SOLAR POWER SYSTEMS

NEW ENERGY LEADS LOW CARBON LIFE



CONTACT:

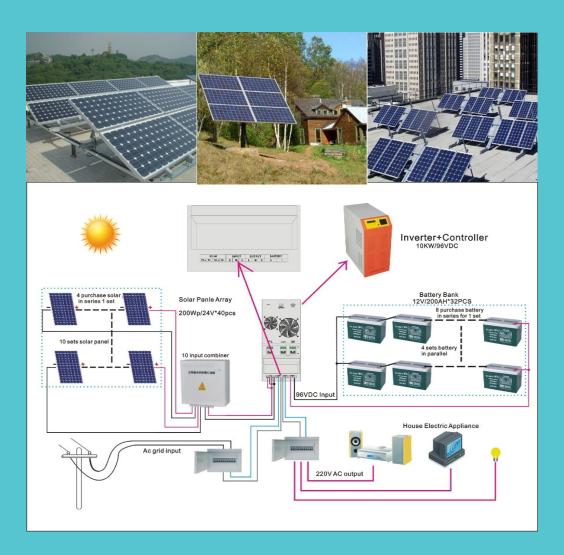

GECO SOLAR POWER SYSTEM

GECO Solar Power System is specialized in design and selling solar power system products. For solar system mostly use for household power supply, have main charger when non-sunshine. very useful system. Pure sine wave output, can take all inductive loads.

Solar off grid system:solar panel+hybird inverter(controller ,inverter)+battery


(other parts as PV array combiner,rack,cable can optional) System Application:

- 1,Living house and home building;
- 2.Office building ,factory and warehouse
- 3. Shopping mall, venue, stadium and so on
- 4. Power station, field operation and some huge engineer construction

Good quality, best price and better technical support and service, make GECO Solar Power System as your most valuable cooperator in renewable energy.

new energy leads low carbon life.



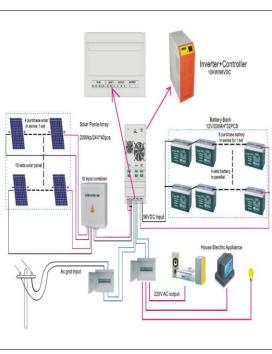

	Off grid solar power supply system-	SP-500W	
System Basic Information	Solar panel rated output power:400W Suitable for daily power consumption : <200 Allowable max loads power : 600W		
Solar panel	type:mono solar panel(poly optional) Max power :200w Vmp:34.4V Voc:43.2V Imp 5.2A weight:15KG Size : 1610*670*35mm 25 years life time (CE TUV) Connect way:2 pcs panels in parallel	2pcs	
Hybrid solar Inverter	Solar inverter with controller built it Inverter power:SC500w/24v With MPPT controller :20A/24v LCD display,With AC charger built in Protection against short-circuit, over load, and low-voltage protection Output:110v,120v,220v,230v,240v(optional) Product size:430*145*224mm Weight:9.3KG	QTY 1pc	SP-500w Mono panel complete system price USD. Poly panel complete system price USD. Notes: 1.pictures show are for reference. 2.power output data is based on areas with daily average peak power shine of 4.5hrs
Battery TF Bisson B	Capacity:12V/100AH full sealed Solar power lead-acid battery, Service life:5-6 years , Size:330*171*214mm Weight:28KG Connect way:2 pcs panels in series as a string,	QTY 2pcs	3.the battery capacity is designed for power storage of 1.5-2 days PV output 4.solar panel rack can be specially designed based on site condition Remark:
panel ground rack	Ground rack installation including complete fittings (other type of rack can be customized as per client's requirement)	QTY 1set	 solar panel have 5 years warranty; other parts have 2 years warranty; ship the free parts for service Accept OEM MOQ:1 set
Cables	4mm2 cable,(one red and one black) International standard, with specification suitable for solar system,	QTY 100m	

Off grid solar power supply system- SP-1KW			
System Basic Information Solar panel	Solar panel rated output power:800W Suitable for daily power consumption: <48 Allowable max loads power: 1.2KW type:mono solar panel(poly optional) Max power:200w	QTY 4pcs	
	Vmp:34.4V Voc:43.2V Imp 5.2A weight:15KG Size: 1610*670*35mm 25 years life time (CE TUV) Connect way:2 pcs panels in series as a string,2 strings in parallel	•	SP-1KW
Hybrid solar Inverter Battery	Solar inverter with controller built it Inverter power:SC1kw/24v With MPPT controller :40A/24V Charging efficiency; 90%-95%, LCD display inverter and controller info With AC charger built in Output:110v,120v,220v,230v,240v(option al) Product size:450*220*260mm Weight:19KG	QTY 1pc	Mono panel complete system price USD. Poly panel complete system price USD. Notes: 1.pictures show are for reference. 2.power output data is based on areas with daily average peak
TF STANSON SOLAR panel ground rack	Capacity:12V/200AH full sealed Solar power lead-acid battery, Service life:5-6 years , Size:522*238*218mm Weight:58KG Connect way:2 pcs panels in series as a string,	QTY 2pcs	power shine of 4.5hrs 3.the battery capacity is designed for power storage of 1.5-2 days PV output 4.solar panel rack can be specially designed based on site condition
	Ground rack installation including complete fittings (other type of rack can be customized as per client's requirement)	QTY 1set	Remark: 1) solar panel have 5 years warranty; 2) other parts have 2 years warranty;
Cables	6mm2 (one red and one black) cable,International standard,with specification suitable for solar system	QTY 100m	3) ship the free parts for service4) Accept OEM5) MOQ:1 set

	Off grid solar power supply sys	stem- SP-2k	(W
System	Solar panel rated output power: 1600V	V	7 F 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7
Basic Information	Suitable for daily power consumption : <6	6400WH	
	Allowable max loads power : 2.4KW		
Solar panel	type:mono solar panel(poly optional)	QTY	
	Max power :200w	8pcs	
	Vmp:34.4V Voc:43.2V Imp		
000000 122222	5.2A weight:15KG		
	Size : 1610*670*35mm		
	25 years life time (CE TUV)		
	Connect way:2pcs panels in series as	a	
	string,4 strings in parallel		
			SP-2kw
Hybrid solar Inverter	Inverter power:SC2kw/48v MPPT	QTY	Mono panel complete system
	Controller model:48v/30A Charging	1PC	price USD.
	efficiency; 90%-95%,		Poly panel complete system
	LCD display inverter and controller info		price USD.
	With AC charger built in		Notes:
	Output:110v,120v,220v,230v,240v(option a	ıl)	1.pictures show are for reference.
	Product size:470*230*490mm		2.power output data is based on
	Weight:30.6KG		areas with daily average peak
Battery			power shine of 4.5hrs
	Capacity:12V/200AH full sealed	QTY	3.the battery capacity is designed
	Solar power lead-acid battery,	4pcs	for power storage of 1.5-2 days PV
	Service life:5-6 years ,		output
Reshorseable Statisty Lead Asia Statisty SFM - 200 Owner SFM - 200 Owner	Size:522*238*218mm		4.solar panel rack can be
18 A A A A A A A A A A A A A A A A A A A	Weight:58KG		specially designed based on site
	Connect way:4 pcs panels in series as	a	condition
	string,		
Solar panel ground rack	Ground rack installation	QTY	
. 4.	including complete fittings	1set	Remark:
THE REAL PROPERTY.			1)solar panel have 5 years
THE PERSON NAMED IN			warranty; 2)other parts have 2 years
	(other type of rack can be customized	as	warranty;
	per client's requirement)		3) ship the free parts for service
		QTY	4) Accept OEM 5) MOQ:1 set
Cables	6mm2 cable ,(one red and one black)	100m	, , , , , , , , , , , , , , , , , , , ,
	International standard,	100111	
	with specification suitable for solar		
	system		

Off grid solar power supply system- SP-3KW			
System Basic Information	Solar panel rated output power: 2400W Suitable for daily power consumption: <9600 Allowable max loads power: 3.6KW	DWH	
Solar panel	type:mono solar panel(poly optional) Max power :200w Vmp:34.4V Voc:43.2V Imp 5.2A weight:15KG Size : 1610*670*35mm 25 years life time (CE TUV) Connect way:2pcs panels in series as a string,6 strings in parallel	QTY 12pcs	SP-3kw
Hybrid solar Inverter Battery	Inverter power:SC3kw/48v MPPT Controller model:48v/40A Charging efficiency; 90%-95%, LCD display inverter and controller info With AC charger built in Output:110v,120v,220v,230v,240v(optional) Product size:470*230*560mm Weight:40KG Capacity:12V/200AH full sealed	QTY 1pc	Mono panel complete system price USD. Poly panel complete system price USD. Notes: 1.pictures show are for reference. 2.power output data is based on area with daily average peak power shine
Solar panel ground rack	Solar power lead-acid battery, Service life:5-6 years , Size:522*238*218mm Weight:58KG Connect way:4 pcs panels in series as a string,2strings in parallel Ground rack installation	8pcs	of 4.5hrs 3.the battery capacity is designed fo power storage of 1.5-2 days PV output 4.solar panel rack can be speciall designed based on site condition
	including complete fittings (other type of rack can be customized as per client's requirement)	1set	Remark: 1)solar panel have 5 year warranty; 2)other parts have 2 year
Cables	8mm2 cable,(one red and one black) International standard, with specification suitable for solar system,	QTY 100m	warranty; 3)ship thefreeparts for service 4)Accept OEM 5)MOQ:1 set

	Off grid solar power supply syste	em- SP-5K	W
System	Solar panel rated output power: 4KW		
Basic Information	Suitable for daily power consumption : <16KWH		APPENDING TO SERVICE
	Allowable max loads power : 6KW		All the second s
Solar panel	type:mono solar panel(poly optional)	QTY	
	Max power :200w	20pcs	
	Vmp:34.4V Voc:43.2V		
	Imp 5.2A weight:15KG		
999998	Size : 1610*670*35mm		
	25 years life time (CE TUV)		
	Connect way:4pcs panels in series as a		
	string,5 strings in parallel		
PV Array Combiner	Model:H6T-96v Multiple PV strings inputs.	QTY	SP-5kw
	Simplify wiring between PV array and	1pc	Mono panel complete system
太阳能光伏防雷汇流箱	controller. protections to controller		Price USD. Poly panel complete system
	Wide range of DC input voltage		
With the state of	Reliable thunderstorm& surge protection		price USD.
Hybrid solar Inverter	Inverter power:5kw/96v	QTY	
Charles and the second second second	MPPT Controller model:96v/60A	1pc	Notes:
	Charging efficiency; 90%-95%,	'	1.pictures show are for reference.
	LCD display inverter and controller info		2.power output data is based on
	With AC charger built in		areas with daily average peak power
	Output:110v,120v,220v,230v,240v(optional)		shine of 4.5hrs
	Product size:470*230*560mm		3.the battery capacity is designed
	Weight:49KG		for power storage of 1.5-2 days PV
Battery	Capacity:12V/200AH full sealed	QTY	output
	Solar power lead-acid battery,	16pcs	4.solar panel rack can be
	Service life:5-6 years ,		specially designed based on site
Rescheripsonin Statistics Rescheripsonin Statistics Rescheripsonin Statistics SFM - 200 Statistics SFM - 2	Size:522*238*218mm		condition
Service de la constante de la	Weight:58KG		
AN CO.	Connect way:8 pcs panels in series as a		
	string,2 strings in parallel		Remark:
Solar panel ground rack	Ground rack installation	QTY	1) solar panel have 5 years
and the same	including complete fittings	1set	warranty;
			2) other parts have 2 years
	(other type of rack can be customized as		warranty;
	per client's requirement)		3) ship the freeparts for service
Cables	10mm2 cable,(one red and one black)	QTY	4) Accept OEM
	International standard, with specification	100m	5) MOQ:1 set
	suitable for solar system,		

	Off grid solar power supply system-	SP-6KW	
System Basic Information	Solar panel rated output power: 5.6KW Suitable for daily power consumption: <28KWH Allowable max loads power: 7KW		A A MANUAL MANUA
PV Array Combiner	type:mono solar panel(poly optional) Max power :200w Vmp:34.4V Voc:43.2V Imp 5.2A weight:15KG Size : 1610*670*35mm 25 years life time (CE TUV) Connect way:4 pcs panels in series as a string, 7 strings in parallel Model:H8T-96v Multiple PV strings inputs Simplify wiring between PV array	QTY 28pcs QTY 1pcs	SP-6kw Mono panel complete system
Hybrid solar Inverter	and controller, protections to controller ,features: Wide range of DC input voltage Reliable thunderstorm& surge protection Inverter power:6kw/96v	QTY	price USD. Poly panel complete system price USD. Notes:
	MPPT Controller model:96v/60A Charging efficiency; 90%-95%, LCD display inverter and controller info With AC charger built in Output:110v,120v,220v,230v,240v(optional) Product size:590*470*730mm Weight:64KG	1рс	1.pictures show are for reference. 2.power output data is based on area with daily average peak power shine of 4.5hrs 3.the battery capacity is designed fo power storage of 1.5-2 days PV output
Battery TF White the same of	Capacity:12V/200AH full sealed Solar power lead-acid battery, Service life:5-6 years , Size:522*238*218mm Weight:58KG Connect way:8 pcs panels in series as a string, 2 strings in parallel	QTY 16pcs	4.solar panel rack can be speciall designed based on site condition Remark: 1)solar panel have 5 year warranty; 2)other parts have 2 year
Panel ground rack	Ground rack installation including complete fittings (other type of rack can be customized as per client's requirement)	1set	warranty; 3)ship the free parts fo service 4)Accept OEM 5)MOQ:1 set
Cables	10mm2 cables(one red and one black) International standard, with specification suitable for solar system,	QTY 200m	

	Off grid solar power supply system-	SP-8KW	1
System Basic Information	Solar panel rated output power: 7.2KW Suitable for daily power consumption: <29KWH Allowable max loads power: 9KW		
Solar panel	type:mono solar panel(poly optional) Max power :200w Vmp:34.4V Voc:43.2V Imp 5.2A weight:15KG Size : 1610*670*35mm 25 years life time (CE TUV) Connect way:4pcs panels in series as a string, 9 strings in parallel	QTY 36pcs	
A PR M A PROPERTY AND A PROPERTY AN	Model:H10T-96v Multiple PV strings inputs Simplify wiring between PV array and controller, protections to controller ,features: Wide range of DC input voltage Reliable thunderstorm& surge protection	QTY 1pcs	SP-8kw Mono panel complete system price USD. Poly panel complete system price USD.
Hybrid solar Inverter	Inverter power:8kw/96v MPPT Controller model:96v/80A Charging efficiency; 90%-95%, LCD display inverter and controller info With AC charger built in Output:110v,120v,220v,230v,240v(optional) Product size: 590*470*730mm Weight:91KG	1pc	Notes: 1.pictures show are for reference. 2.power output data is based on areas with daily average peak power shine of 4.5hrs 3.the battery capacity is designed for power storage of 4.5.2 days DV output
Battery TF Bistory Time the state of the	Capacity:12V/200AH full sealed Solar power lead-acid battery, Service life:5-6 years , Size:522*238*218mm Weight:58KG Connect way:8 pcs panels in series as a string, 3 strings in parallel	QTY 24pcs	power storage of 1.5-2 days PV output 4.solar panel rack can be specially designed based on site condition Remark: 1)solar panel have 5 years warranty;
Panel ground rack Cables	Ground rack installation including complete fittings (other type of rack can be customized as per client's requirement) 10mm2 cables(one red and one black) International standard, with specification suitable for solar system,	QTY 1set QTY 200m	2)other parts have 2 years warranty; 3)ship the free parts for service 4)Accept OEM 5)MOQ:1 set

	Off grid solar power supply system-	SP-10K	N
System	Solar panel rated output power: 8KW		
Basic Information	Suitable for daily power consumption: <32KWH		
	Allowable max loads power : 12KW		
Solar panel	type:mono solar panel(poly optional)	QTY	
mmmmm	Max power :200w	40pcs	
	Vmp:34.4V Voc:43.2V		
	Imp 5.2A weight:15KG		
22222	Size : 1610*670*35mm		
202020	25 years life time (CE TUV)		
351515	Connect way:4pcs panels in series as a string,		
	10 strings in parallel		
PV Array Combiner	Model:H10T-96v Multiple PV strings inputs	QTY	SP-10kw
	Simplify wiring between PV array	1pcs	Mono panel complete system
太阳能光伏防雷汇流箱	and controller, protections to controller ,features:		price USD.
AL AND	Wide range of DC input voltage		Poly panel complete system
	Reliable thunderstorm& surge protection		price USD.
SHIP STREET			
Hybrid solar Inverter	Inverter power:10kw/96v	QTY	
	MPPT Controller model:96v/100A	1pc	Notes:
	Charging efficiency; 90%-95%,		1.pictures show are for reference.
	LCD display inverter and controller info		2.power output data is based on areas
	With AC charger built in		with daily average peak power shine of 4.5hrs
	Output:110v,120v,220v,230v,240v(optional) Product size: 590*470*730mm		01 4.51118
	Weight:107KG		3.the battery capacity is designed for
Rattory	Capacity:12V/200AH full sealed	QTY	power storage of 1.5-2 days PV output
Battery	Solar power lead-acid battery,	32pcs	4.solar panel rack can be specially
	Service life:5-6 years ,	υ2ρισ	designed based on site condition
Residence States	Size:522*238*218mm		
TF 95 4.700	Weight:58KG Connect way:8 pcs panels in		
の意	series as a string, 4strings in parallel		Remark:
Panel ground rack	Ground rack installation	QTY	1)solar panel have 5 years
J. Carrotte	including complete fittings	1set	warranty; 2)other parts have 2 years
	3 1 3	-	warranty;
	(other type of rack can be customized as per		3)ship the free parts for service
	client's requirement)		4)Accept OEM
Cables	12mm2 cables(one red and one black)	QTY	5)MOQ:1 set
	International standard, with specification suitable	200m	-,5
	for solar system		

Off grid solar power supply system- SP-15KW			
System	Solar panel rated output power: 12000W		Maria Cara
Basic Information	Suitable for daily power consumption : <48KWH		
	Allowable max loads power : 16KW		
Solar panel	type:mono solar panel(poly optional)	QTY	
mmmmm	Max power :200w	60pcs	
	Vmp:34.4V Voc:43.2V		
22222	Imp 5.2A weight:15KG		
	Size : 1610*670*35mm		
	25 years life time (CE TUV)		
	Connect way:4pcs panels in series as a string,		
	16 strings in parallel	0.77/	
PV DC cabinet	Model:H12T-120v Multiple PV strings inputs	QTY	SP-15kw
la Company	Simplify wiring between PV array	1pcs	Mono panel complete system
■ Name >	and controller, protections to controller ,features:		price USD.
	Wide range of DC input voltage		Poly panel complete system
20000	Reliable thunderstorm& surge protection Service time :10 years		price USD.
Controller	MPPT controller model:120V100A	QTY	Notes:
Controller	Charging efficiency; 90%-95%,	1pc	1.pictures show are for reference.
	MPPT charging mode intelligent control.,	IPO	2.power output data is based on areas
	temperature compensation, various protection		with daily average peak power shine
	functions; product size:395*345*205		of4.5hrs
	weight:6KG		2 the bettery consists is designed for
Inverter	Pure sine wave inverter;15kw/120v Output 220v	QTY	3.the battery capacity is designed for power storage of 1.5-2 days PV output
	Use copper transformer;	1pc	4.solar panel rack can be specially
	Bypass function with AC charger;		designed based on site condition
	Output:,120v,220v,230v,240v(optional)		3
	Product Size:590*470*730mm		
	Weight:138KG		Remark:
Battery	Capacity:12V/200AH full sealed	QTY	1)solar panel have 5 years
	Solar power lead-acid battery,	40pcs	warranty;
	Service life:5-6 years ,		2)other parts have 2 years
Residence Residency Risk 200 cm	Size:522*238*218mm		warranty;
30	Weight:58KG Connect way:10 pcs panels in		3)ship the free parts for
	series as a string, 4strings in parallel		service(best service in china)
panel ground rack	Ground rack installation	QTY	4)Accept OEM
	including complete fittings	1set	5)MOQ:1 set
	(other type of rack can be expressized as see		
A STATE OF THE STA	(other type of rack can be customized as per client's requirement)		
	onents requirement)		
		<u> </u>	

Cables	

12mm2 cables(one red and one black)
International standard, with specification suitable for solar system,

QTY 200m

	Off grid solar power supply sys	tem- SP-20	OKW
System	Solar panel rated output power: 16KW		The spike of the second second
Basic Information	Suitable for daily power consumption: <60K		
	Allowable max loads power : 24KW		
Solar panel	type:mono solar panel(poly optional)	QTY	No. to the state of
	Max power :200w	80pcs	
	Vmp:34.4V Voc:43.2V		
	Imp 5.2A weight:15KG		
	Size : 1610*670*35mm		
202202	25 years life time (CE TUV)		
	Connect way:10pcs panels in series as a		(4.4)
	string,8strings in parallel		
PV DC cabinet	Model:H8T-240v Multiple PV strings inputs	QTY	SP-20kw
	Simplify wiring between PV array	1pc	Mono panel complete system
Oppo-	and controller, protections to controller,		price USD.
Manual III	Wide range of DC input voltage		Poly panel complete system
	Reliable thunderstorm& surge protection		price USD.
7777000-31-000000			
- a harone B. B. announce			Notes:
Controller	MPPT controller model:240/100A	QTY	1. pictures show are for reference.
	Charging efficiency; 90%-95%,	1pc	2. power output data is based on
	charging mode, intelligent control.,		areas with daily average peak
The state of the s	temperature compensation,		power sunshine of 4.5hrs
	various protection functions;		3. the battery capacity is designed for
Inverter	Pure sine wave inverter;20kw DC input:240v	QTY	power storage of 1.5-2 days PV
	Output 220v or 380v (optional)	1pc	output
III III III III III III III III III II	Use copper transformer;		4. solar panel rack can be specially
	Bypass function with AC charger;		designed based on site condition
	Product size:900*600*1380mm		
	Weight:190KG		
Battery	Capacity:12V/200AH	QTY	
TF BLANCE	Solar power lead-acid battery,	60pcs	
	Service life:5-6 years ,	ООРОО	
	Size:522*238*218mm		
\$59 120	Weight:58KG Connect way:20 pcs panels		
	in series as a string, 3strings in parallel		

panel ground rack	Ground rack installation	QTY	Remark:
	including complete fittings	1set	solar panel have 5 years warranty;
	(other type of rack can be customized as per		other parts have 2 years warranty;
	client's requirement)		3) ship the free parts for service
	Client's requirement)		4) Accept OEM
Cables	10mm2 aphle/and rad and and block)	QTY	5) MOQ:1 set
Cables	16mm2 cable(one red and one black)		
	International standard, with	400m	
	specification suitable for solar system		

Remark: