



**Load Break Disconnecter Switch  
GGLZ2-125A-1600A CHANGEOVER LOAD BREAK SWITCH**

External Dimension and installation Dimension of GGLZ2-125A-1600A Changeover Load isolation switch :

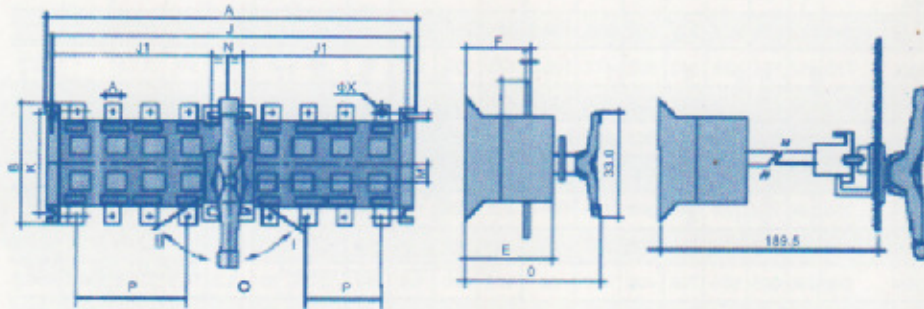

Direct operation on front face GLZ2-125A-1600A

Operation outside GLZ2-125A-1600A

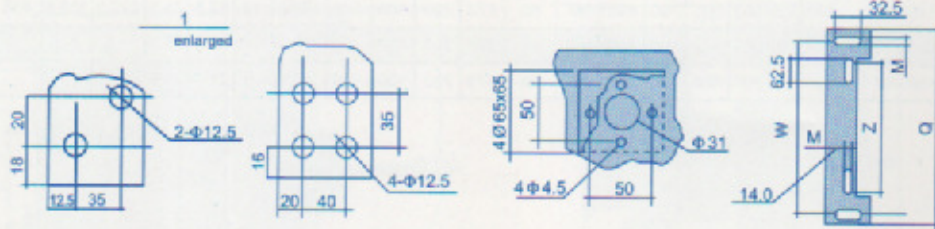

1000A

1250A-1600A

Installation size of handle seat outside board

Installation bottom plate for operation outside the board

External Dimension and Installation Dimension (Table) :

Specification	External Dimension and Installation Dimension																	
	A	B	C	E	F	J	J1	K	M	N	P	Q	R	S	T	W	Z	
DGLZ2-125A-1600A																		
125A-160A/3	319	85	141	89	24	299	120	65	6.5	59	36	244	20	25	3.5	216	95	
125A-160A/4	379	85	141	89	24	359	150	65	8.5	59	36	244	20	25	3.5	216	95	
200A-250A/3	405	110	146	101	25	385	160	90	8.5	65	50	244	25	30	3.5	216	116	
200A-250A/4	505	110	146	101	25	485	210	90	8.5	65	50	244	25	30	3.5	216	116	
315A-400A/3	535	160	191	126	37	515	210	140	8.5	95	65	311	32	40	5	280	180	
315A-400A/4	655	180	191	126	37	515	210	140	8.5	95	65	311	32	40	5	280	180	
500A-630A/3	635	160	191	126	37.5	515	210	140	8.5	95	65	311	40	50	8	280	180	
500A-630A/4	655	160	191	126	37.5	515	210	140	8.5	95	65	311	40	50	6	280	180	
1000A/3	863	200	272	163	48.5	811	355	220	8.5	105	120	311	60	56	8	280	180	
1000A/4	1072	200	272	163	48.5	1051	473	220	8.5	105	120	311	60	56	8	280	180	
1250A/3	836	200	272	163	48.5	811	355	220	8.5	105	120	311	80	69	8	280	180	
1250A/4	1072	200	272	163	48.5	1051	473	220	8.5	105	120	311	60	56	8	280	180	
1600A/3	836	200	272	163	48.5	811	355	220	8.5	105	120	311	80	69	10	280	180	
1600A/4	1072	200	272	163	48.5	1051	473	220	8.5	105	120	311	60	56	10	280	180	

